


MaxiCharger DC Compact

40kW



MaxiCharger DC Compact

Big Power and Big Value in a Compact Package

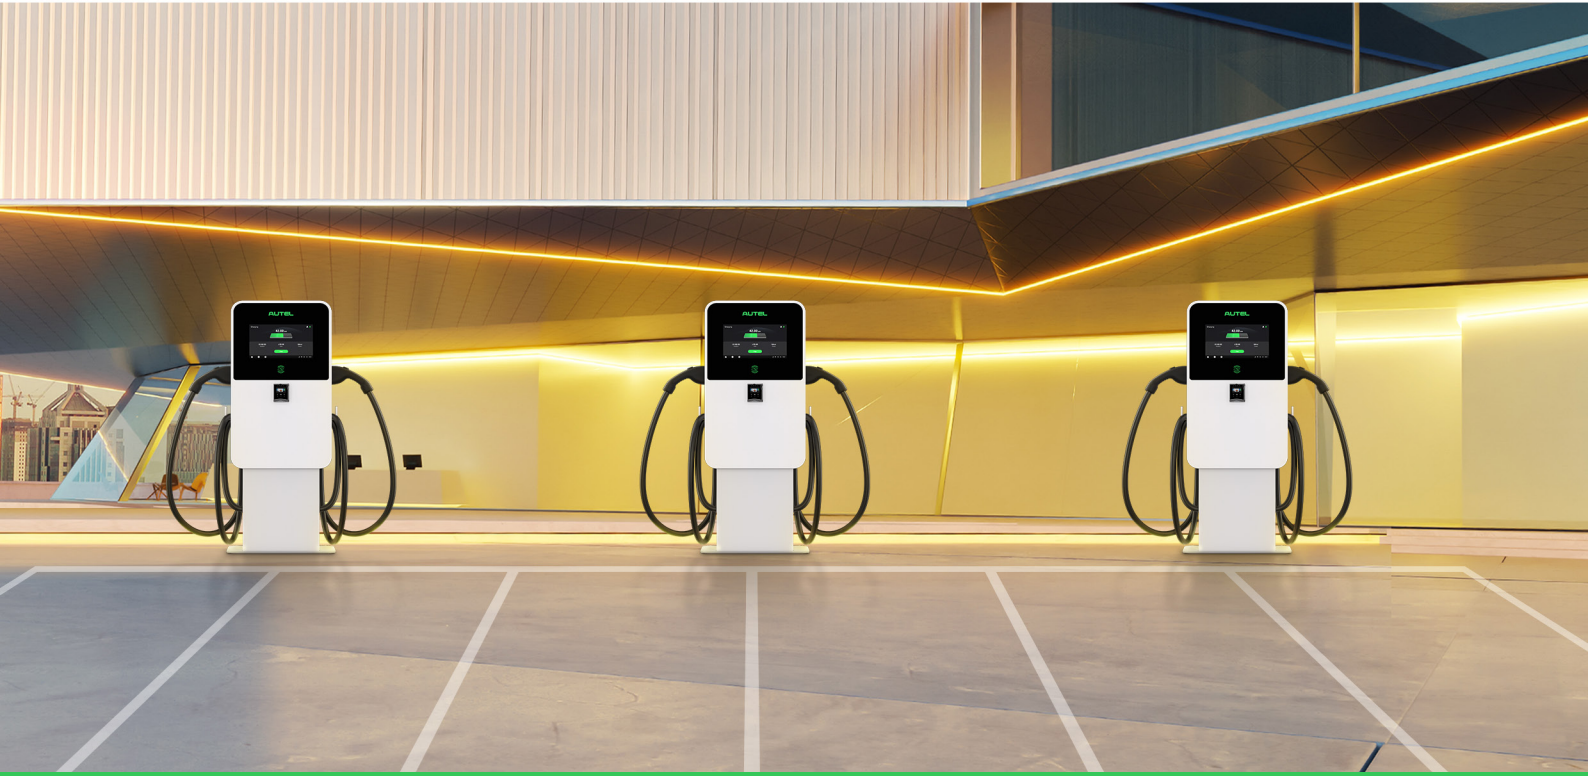

Fast and Effective

Built to increase charging efficiency

- Dual-ports provide up to 40kW of power
- Charge 2 vehicles simultaneously
- A 30 min charge equates to 80+ miles of range



Compact Design

Optimized for any location

- Ultra-compact with big DC power in a small package
- Flexible installation allows for fixed or mobile positioning
- DC Compact has low installation costs, meaning a faster ROI due to reduced capital expenditures for the site operator



Smart Advertising and Communication Portal

Improve your ROI

- User-friendly 21.5-inch LCD touch screen
- Powered by smart operating system, Android 10 with enhanced advertising placement
- Communicate, promote or attract customers generating new revenue streams

A closer look at MaxiCharger DC Compact



OCPP Compliance



18 Safety Monitoring Items



Compatible with CCS1, CHAdeMO



One Stop Cloud Network Management



Plug & Charge



Support APP, RFID Card, Credit Card, Mobile Payment




96% Charging Efficiency



Smart Charging



Weather Resistant

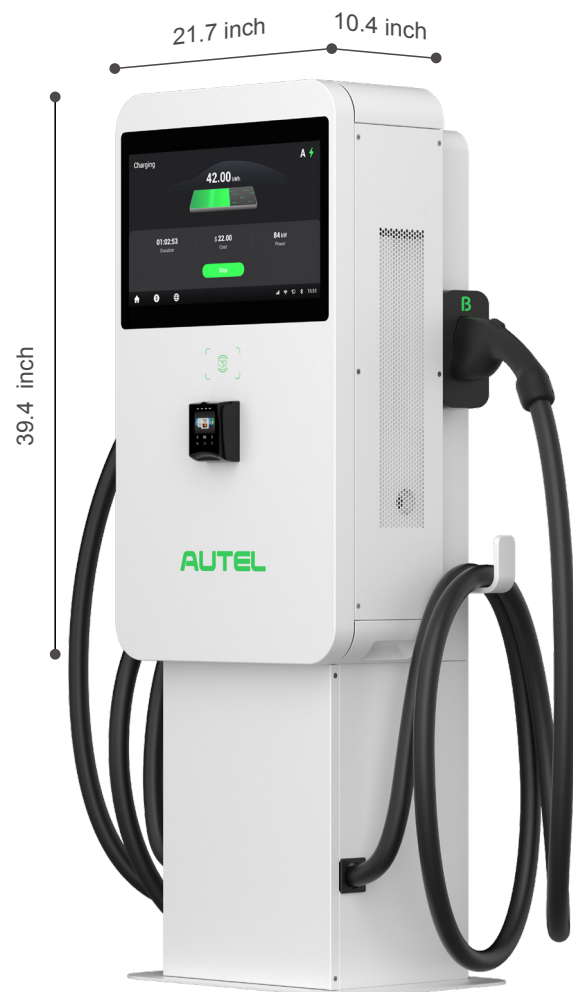

Technical Specifications

DC Output Connection

Charging mode	Mode 4: CCS1
Output power	40kW
Output voltage	150-950V
Max output current	CCS1: 133A; CHAdeMO: 125A
Number of outputs	2*CCS1, or 1*CCS1+1*CHAdeMO, or 1*CCS1
Peak efficiency	≥96%

AC Input Connection

Earthing system	3P, PE (No neutral)
Input voltage	3-phase 480V AC+10%~-15%
Input frequency	60Hz
Power factor	≥0.99
Harmonic distortion (THDi)	≤5%

General Characteristics

Enclosure rating	NEMA 3S
Operating altitude	6561.7ft (2000m)
Operating temperature range	-22°F ~ +131°F (+113°F to +131°F with linear power de-rating) -30°C ~ +55°C (+45°C to +55°C with linear power de-rating)
Storage temperature range	-40°F ~ +158°F (-40°C ~ +70°C)
Mounting	Wall or floor using a pedestal
Dimensions (H×W×D)	39.4 × 21.7 × 10.4 inch (1000 × 550 × 265 mm)
Screen type	21.5 inch LCD touch screen (1920*1080)
Cable length	18.0ft (5.5m) standard; 24.6ft (7.5m) optional

User Interface

Status indication	LED/LCD/APP
User interface	Autel Charge APP; Autel Charge Cloud
Connectivity	4G, Wi-Fi, Ethernet
Communication protocols	OCPP 1.6J (Can be upgraded to OCPP 2.0.1 later)
User authentication	APP, RFID card, Credit Card (Optional)

Software Update

OTA updates via web portal

Certification and Standards

Safety and compliance	UL 2202, UL 2231-1, UL 2231-2, CSA No.107.1-16, NEC Article 625, ISO 15118
EMC compliance	FCC 15 Class A
Warranty	24 months, warranty extension possible

* All pictures shown are for illustration purpose only. Actual product and specifications may vary due to product enhancement

AUTEL[®]

Autel Digital Power Co., Ltd

☎ Phone: (844) 765-0150

✉ E-mail: evsupport@autel.com

🌐 Website: autelenergy.com

Autel Energy

